


MIBALAJI


RECOGNITION OF
Quality Plus

BC-9 MINI LIMIT SWITCHES




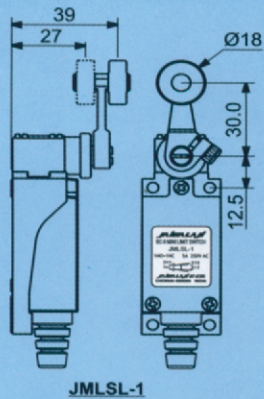

JMLS-1

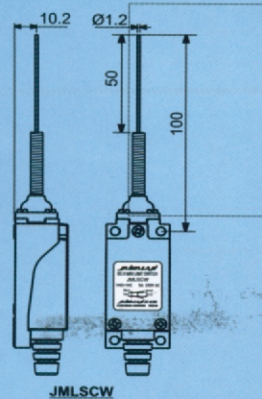


JMLSCW

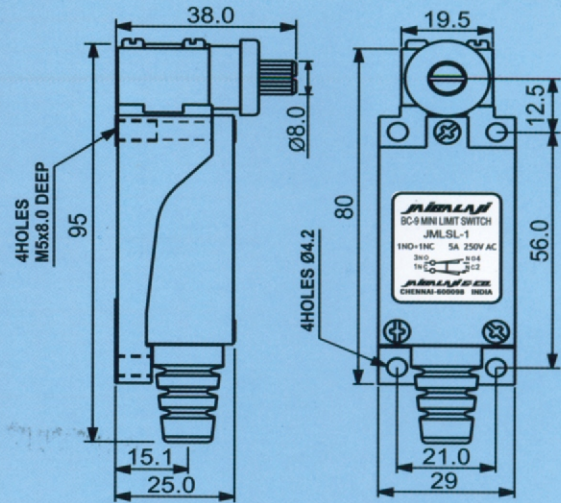



Wiring Diagram




Angular Motion

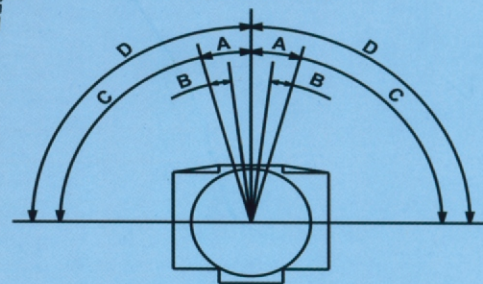


Linear Motion

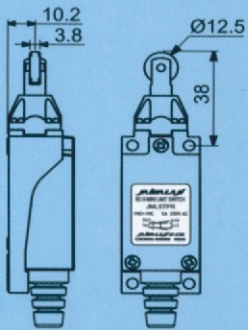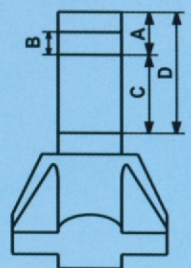


JMLSTPR

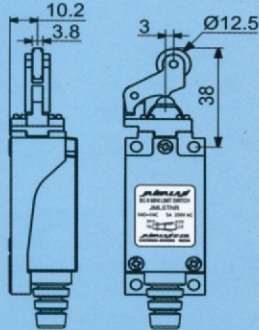


JMLSTNR

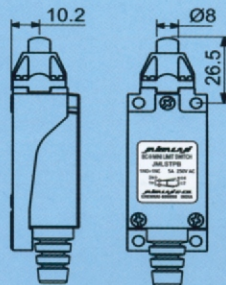


JMLSTPB

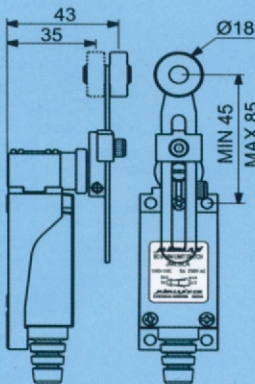


JMLSLA

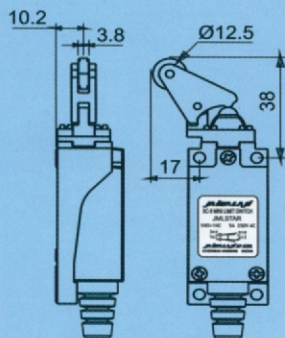

JMLSTAR

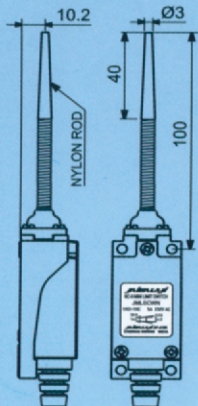

JMLSCWN

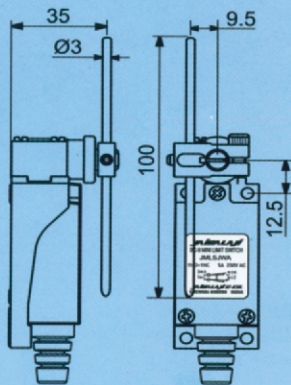

JMLSJWA

MODEL	JMLS-1 JMLS JMLSJWA (max)	JMLSTPR JMLSTPB (mm) (max)	JMLSCW JMLSCWN (mm) (max)	JMLSTNR JMLSTAR (mm) (max)
A -Travel to Trip	15°	1.5	30	2.0
B -Travel to Reset from Trip Point	8°	0.8	-	-
C -Over Travel	75°	4.0	20	3.5
D -Total Travel	90°	5.5	50	5.5
Operating Force	600gms At30 Radius	900gms	90gms	900gms

PRODUCT SPECIFICATIONS

Utilization Category: AC15 and DC13 as per IEC-60947-5 & IS: 13947-5-1
 Rated Insulation Voltage : 250V AC
 Rated Thermal Current Ith : 5A
 Contact Ratings : AC15 RATING 250V, 50Hz, 2.0A, DC13 RATING 125V, 0.1A
 Mechanical Life Span : 10 x 10⁶ Operations
 Enclosure Category : IP-64
 Max. Operation Speed : 120 cycles/minute
 Tightening Torque of Terminal Screw : 0.8 Nm(Max.)
 Applicable wire : Conductor size: 0.75 - 1.25 mm²
 Outer Dia of cable: 6-9 mm

Manufactured by:

JAIBALAJI & CO.

Post Box No. 27
 89 (New No. 107), SIDCO Industrial Estate
 Ambattur, Chennai -600 098, India
 Phone: 26251279 / 26257859 / 26254470
 Fax: 0091-044-2625038.
 E-mail: jaibalaji@gems.vsnl.net.in

Area Stockist

Branches : Mumbai - Ph: 022-4092841, Bangalore - Ph: 080-3505254, Delhi - Ph: 011-2244 0955, Pune - Ph: 020-30930997.